


Fall arrest lanyard TWIN

The high quality kernmantle rope with aluminium connectors make a high quality and light lanyard for everyday use.

TECHNICAL
SPECIFICATION

HEIGHT SAFETY

FAR0207

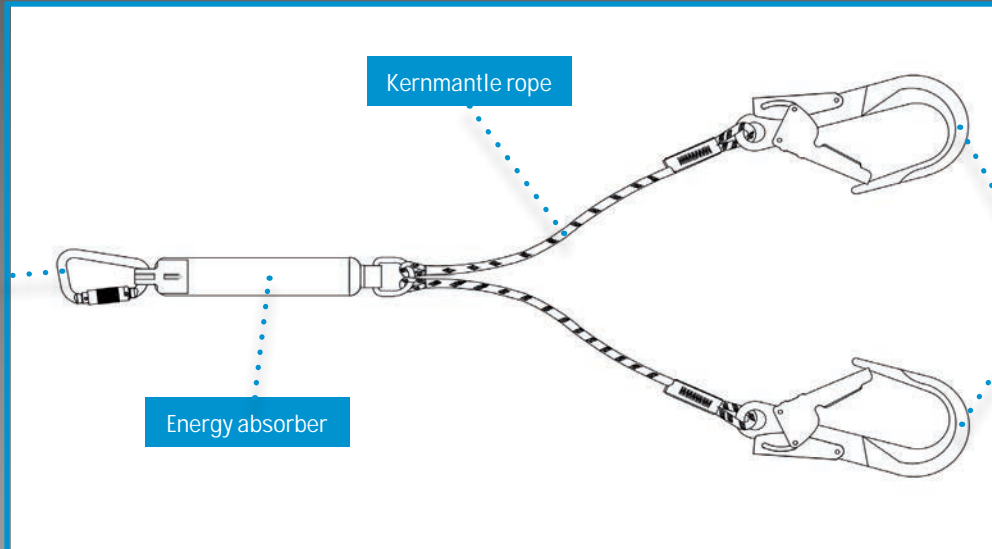

METAL COMPONENTS

Material: Connectors in aluminium.

Finish: Black.

Breaking strength: 23 kN (22 kN for the scaffold hook).

ROPE

Material: Kernmantle rope lanyard diameter 11 mm.

Black with red tracer in the rope to indicate degradation of the material.

Breaking strength: 25 kN.

DIMENSIONS

Size: 2 meters.

Weight: 1960 g (+/- 10 g).

CHARACTERISTICS

Twin kernmantle rope lanyard diameter 11 mm with shock absorber.

Rope ends stitched and covered with polyethylene protective sleeve.

Abrasion resistant thimbles provided within loops.

On one end, shock absorber with fall indicator and 1 quarter turn connector. On the other end 2 scaffold hooks.

1 quarter turn aluminium connector. Gate opening: 21 mm.
Conforms to EN362:2004 Class B.

2 aluminium scaffold hooks. Gate opening 60 mm.
Conforms to EN362:2004 Class A/T.

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that NO alterations to the product are made.

Ensure that the following cleaning methods are NOT used: water over 40°C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

CONFORMITY

EN 355: 2002, VG 11 RFU CNB/P/11.063

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 Minutes.

Dynamic strength: Maximum breaking force does not exceed 6kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kgs.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 13/11/2019-1



Harness PIONEER™ 2 POINTS

TECHNICAL SPECIFICATION

HEIGHT SAFETY

The Pioneer range has a two tone colour scheme to help the user in donning and inspection. Along with light alloy steel hardware makes this a comfortable day to day product.

FAR0203

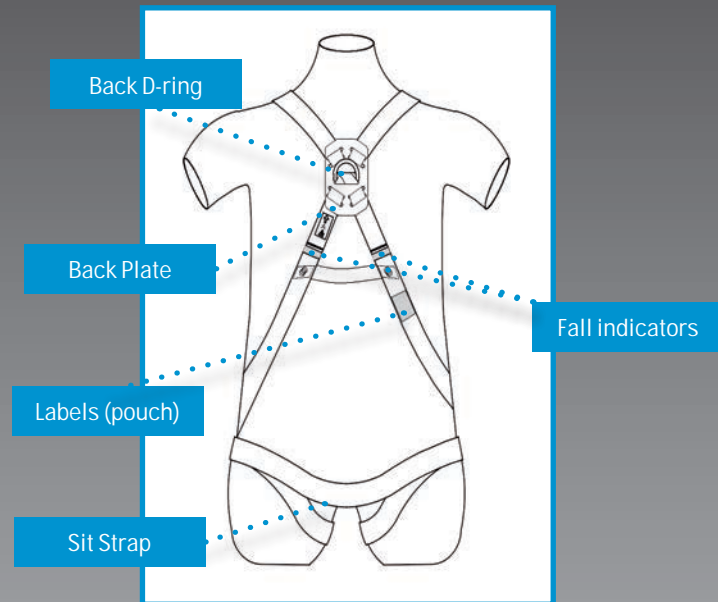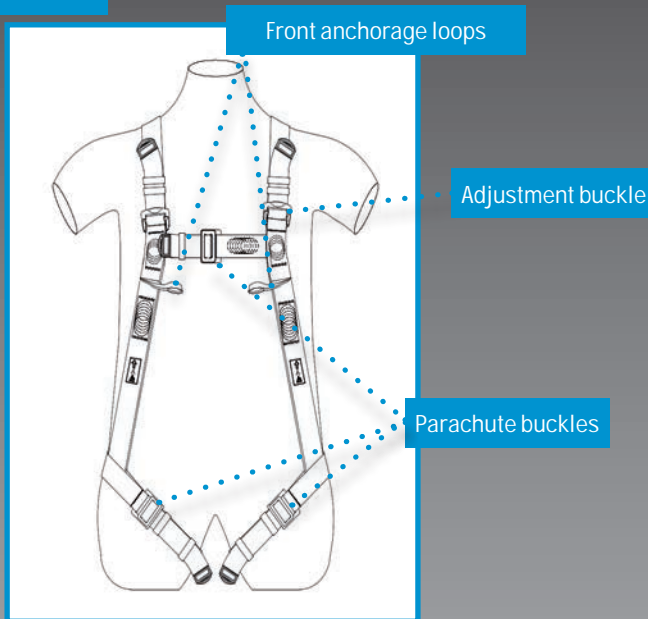

Stitching pattern



METAL COMPONENTS

Material: Alloy steel.

Finish: Black powder coated.

Breaking strength: 23 kN (buckle and frame 15 kN).

DIMENSIONS

Size: Universal.

Weight: 1150 g (+/- 10 g).

STITCHING THREAD

Material: High-tenacity polyester.

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that the following cleaning methods are NOT used: water over 40°C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

WEBBING

Material: Polyester.

Width: 44±1 mm.

Breaking strength: 25 kN.

CHARACTERISTICS

One dorsal attachment D-ring for fall arrest.

Sternal textile loops as anchor point for fall arrest.

Adjustable shoulders, chest and leg straps.

Sub-pelvic strap.

Plastic retainers to keep straps tidy.

Fall indicator for easy inspection.

2 colours for an easy donning.

Labels of inspection and instructions protected in a black PVC pouch.

CONFORMITY

EN 361: 2002 Rated to 140 kg.

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 min at each attachment element.

Dynamic strength: Free fall from 4 m height donned to a test dummy weighing 100 kg at each attachment element.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 13/01/2020-1